


AcceptAlert

Módulos para aceptar o rechazar una alerta en el navegador

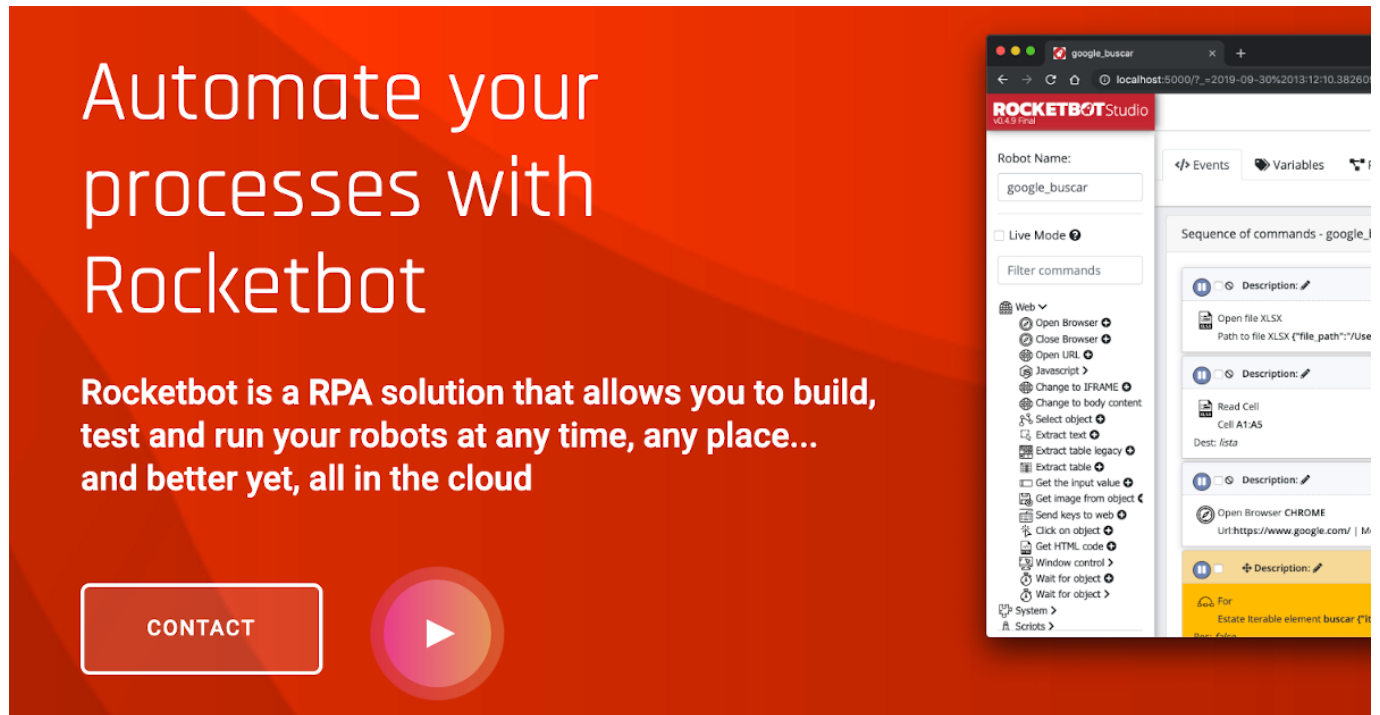

The image shows a promotional banner for Rocketbot Studio on the left and a screenshot of the software interface on the right. The banner has a red background with white text that reads 'Automate your processes with Rocketbot'. Below this, it says 'Rocketbot is a RPA solution that allows you to build, test and run your robots at any time, any place... and better yet, all in the cloud'. There is a 'CONTACT' button and a play icon. The screenshot shows the Rocketbot Studio interface with a robot named 'google_buscar'. It displays a sequence of commands including 'Open Browser', 'Close Browser', 'Open URL', 'Javascript', 'Change to IFRAME', 'Change to body content', 'Select object', 'Extract text', 'Extract table legacy', 'Extract table', 'Get the input value', 'Get image from object', 'Send keys to web', 'Click on object', 'Get HTML code', 'Window control', 'Wait for object', and 'Wait for object'. The interface also shows a 'Sequence of commands' panel with a list of commands and their descriptions.

Como instalar este módulo

Descarga e **instala** el contenido en la carpeta 'modules' en la ruta de Rocketbot.

Descripción de los comandos

AcceptAlert

Confirma o cancela una alerta

Parámetros	Descripción	ejemplo
Opción		
Enviar texto		Texto
Guardar texto		Variable

Esperar Alerta

Espera por una alerta los segundos definidos

Parámetros	Descripción	ejemplo
Segundos		5
Asignar resultado a variable		Variable